




Heat Resistance Foam Tape 5200PQB Series *Development Article*

Heat resistance foam tape 5200PQB series is a kind of double-faced tape; its material is special heat resistant polyolefin foam with tiny and independent-closed-cell foam structure. It provide heat resistance, water and dust proof capability and removability.

Structure

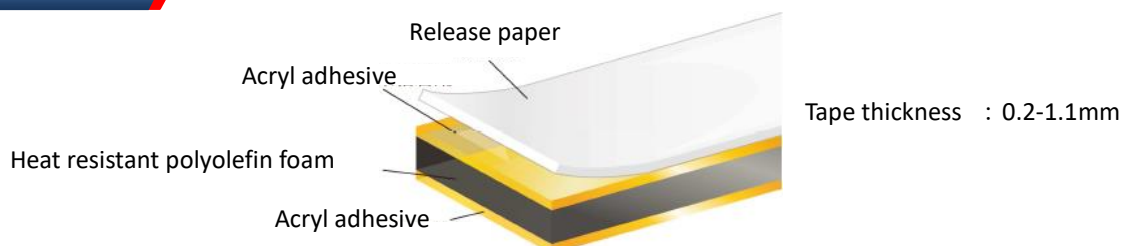

Usage

Apply in uneven surface fixing, water proof, impact buffering.

Merit

- 1) It has excellent heat resistance and achieves good adhesion properties.
- 2) Excellent sealing property of water proof and dust proof.
- 3) With superior anti-peel off property, it keeps high reliable adhesive even applied in curved surface.
- 4) With solid adhesive property for a various substrates.

S. dimensions

Item	Unit	Standard Dimensions			
		5220PQB	5230PQB	5240PQB	52110PQB
Tape Thickness	mm	0.2	0.3	0.4	1.1
Width	mm	Below 1150			
Length	m	Below 50			

General

Item	Unit	Standard Dimensions			
		5220PQB	5230PQB	5240PQB	52110PQB
90°Adhesive Force (SUS Plate)	N/25mm	22.4	28.1	35.9	46.8
40°C Holding Power (SUS Plate)	mm	0.0	0.0	0.0	0.0

Notice

- 1) Thoroughly clean dirt, dust, oil sludge and moisture from surface of the object before applying.
- 2) Avoid sticking twice, lay stuck object aside for hours after sticking.
- 3) Avoid sticking on uneven surface, rough surface, or human body.
- 4) Storage for tapes: Store in cool place and avoid direct sunlight or heat.
- 5) Expiration date: 6 months after shipment date or one year after application, whichever is the longer.
- 6) Contact us directly for uncertain usages if needed.

※ Values recorded in this technical Data Sheet are all measured values, not guaranteed values.

※ Contact us if any other special applications are required.

※ Because 5200PQB series is a developed product, there is a possibility those designs will change.

No additional notice will be made for altering the standard and appearances. When applying this product, judge if it meets the requirement of your products before using and be sure to test in advance before applying.

Sekisui Chemical Co., Ltd

HIGH-PERFORMANCE PLASTICS COMPANY

DEVICE MATERIALS DIVISION

Toranomon 2-chome Tower, 2-3-17

Minato-ku, Tokyo, 105-8450, Japan

TEL : 03-5521-0921

FAX : 03-5521-0922